


**For Geberit cisterns, with internally discharging overflows.
Installation Instructions**

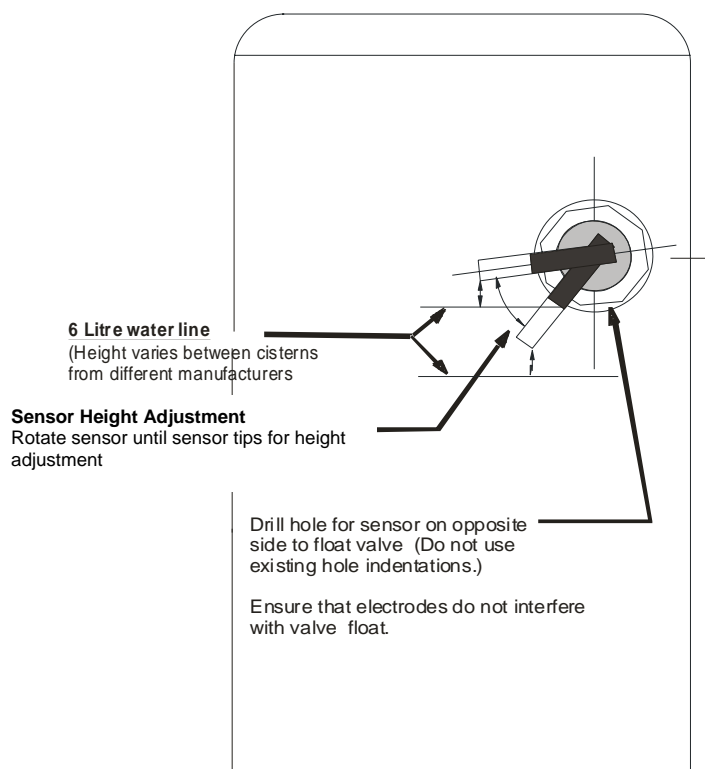

Concealed WC Flushing Cistern

- Connect the sensor to the hole in the same manner as a tank connector. Use washers provided. Do not use jointing compound. Do not over-tighten.
- Ensure that the water level is adjusted to the 6 Litre capacity water line.
- Rotate the sensor until the tips of the electrodes are mid way between the overflow and the 6 Litre line above the water level and tighten the backnut. The tips of the sensor should be above the water line but below the level at which it overflows, through the siphon, into the flushpipe.
- Wire the sensor unit terminals to the corresponding low voltage terminals in the indicator panel.
- To test, bridge the sensor terminals and observe that the red LED illuminates that corresponds to the location described on the indicator panel. The buzzer will also sound.
- To mute the alarm and reset the system after an overflow has occurred refer to the instructions on the indicator panel.

NOTE: All work associated with this installation must be carried out in accordance with the latest edition of the IEE Regulations and The Water Supply (Water Fittings) Regulations 1999.

Important: All information, including illustrations, is believed to be reliable. Users, however, should independently evaluate the suitability of each product for their application. Aquilar Limited makes no warranty as to the accuracy or completeness of the information, and disclaims any liability regarding its use. The only obligations of Aquilar Limited are those in the Aquilar Standard Terms and Conditions of Sale for this product, and in no case will Aquilar Limited be liable for any incidental, indirect, or consequential damages arising from the sale, resale, use or misuse of the product. Specifications are subject to change without notice. In addition, Aquilar Limited reserves the right to make changes – without notification to Buyer – to processing or materials that do not affect compliance with any applicable specification.