

TraceTek Fast Fuel Detection Probe

TraceTek® Fast Fuel Sensor is a fast acting probe designed to detect hydrocarbon fuel floating on water, spreading on a flat surface or collecting in a sump. The probe ignores water, but detects a thin film of fuel floating on the surface.

The probe is available in two lengths for fixed position installations and can also be fitted onto a float assembly if the water level is unpredictable.

Reaction time for the probe is typically a few seconds for light or middle weight fuels such as gasoline, jet fuel, and diesel. It is also responsive to crude oil and some heavier weight fuels and heating oils but becomes progressively slower as the fuel volatility decreases.

In many cases the FFS probe will reset after the probe is removed from contact with the spill and the fuel is allowed to evaporate. Some heavier fuels require that the sensor be soaked in isopropyl alcohol in order to clear the heavier fuel residuals.

The sensor may be used repeatedly without replacement until it will no longer reset. The probe fails in the “alarm” state so there is no ambiguity when it is necessary to replace the probe.

TT-FFS probes are designed to work **only** with TraceTek leak detection instruments, and are not suitable for use with other non-TraceTek circuits. The probe may be periodically tested using a small amount naphtha (lighter fluid). The probe resets when the naphtha evaporates.

Design Features:

- **Fast response to small amount of fuel**
- **Resets for multiple uses**
- **Easily tested**
- **Compatible with TraceTek Instruments**
- **Intermix up to 4 FFS probes with TT5000 sensor cable to form hybrid cable and probe systems**
- **Suitable for installation in CID1 (Zone 0) with appropriate safety barrier**
- **SIL-2 Rated Safety System Component**




FFS Probes without Connectors


Part number	Description
P00000984	TT-FFS-100-L-1
P00000985	TT-FFS-100-L-3
P00000986	TT-FFS-100-L-10
P00000987	TT-FFS-250-L-1
P00000988	TT-FFS-250-L-3
P00000989	TT-FFS-250-L-10

FFS Probes with – MC Series Metal Connectors

Part number	Description
P00000990	TT-FFS-100-MC-1
P00000991	TT-FFS-100-MC-3
P00000992	TT-FFS-100-MC-10
P00000993	TT-FFS-250-MC-1
P00000994	TT-FFS-250-MC-3
P00000995	TT-FFS-250-MC-10

TT-FFS-250-MC-10



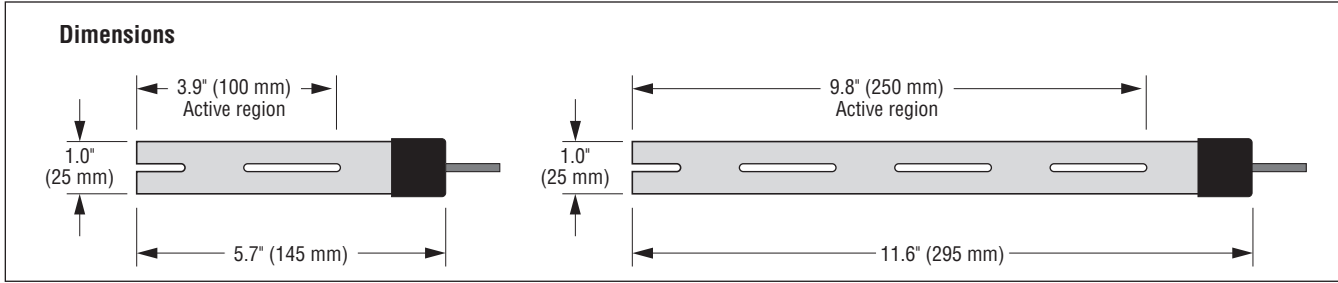

Product Characteristics

External diameter	1 inch (25.4 mm)
Color	Orange
Tube material	Polypropylene with static charge reduction additive
Leader cable	4 x 22 AWG, polyurethane jacketed, fuel resistant
Connector	TraceTek “MC” series compatible with all TraceTek MC components and cable Note: FFS is wired in “End Termination” configuration

Operating Environment Information

Operating/storage temperature	-40°F to 185°F (-40°C to 85°C)
Salt water immersion resistant	30 days in 3% salt water at 20°C without failure or degraded response
Hot water immersion resistant	30 days in 60°C water without failure or degraded response
Acid resistant	24 hours in 10% H ₂ SO ₄ or 10% HNO ₃ without failure or degraded response

Response Time

Representative materials detected:	Typical response time at 20°C:
Gasoline	Less than 5 seconds
Jet A fuel	Less than 5 seconds
Diesel	Less than 5 seconds
Naphtha	Less than 5 seconds
Crude oil	3 minutes
Biodiesel (B100)	45 seconds

Approvals



IS/Class I, Div. 1, Groups A, B, C, D/T4; Class I Zone 0, AEx ia IIC T4
NI/Class I, Div. 2, Groups A, B, C, D/T4; Class I Zone 2, Group IIC T4



IEC 61508 Safety Integrity Level -2 (when used with TTC-1)
Ref BN/PTX/CB859/1580190/06/R/216/0

Tyco and TraceTek are trademarks of Tyco Thermal Controls LLC or its affiliates.

Worldwide Headquarters
Tyco Thermal Controls
 307 Constitution Drive
 Menlo Park, CA 94025-1164
 USA
 Tel: (800) 545-6258
 Tel: (650) 216-1526
 Fax: (800) 527-5703
 Fax: (650) 474-7215
 info@tracetek.com
 www.tracetek.com

Important: All information, including illustrations, is believed to be reliable. Users, however, should independently evaluate the suitability of each product for their particular application. Tyco Thermal Controls makes no warranties as to the accuracy or completeness of the information, and disclaims any liability regarding its use. Tyco Thermal Controls’ only obligations are those in the Tyco Thermal Controls Standard Terms and Conditions of Sale for this product, and in no case will Tyco Thermal Controls or its distributors be liable for any incidental, indirect, or consequential damages arising from the sale, resale, use, or misuse of the product. Specifications are subject to change without notice. In addition, Tyco Thermal Controls reserves the right to make changes—without notification to Buyer—to processing or materials that do not affect compliance with any applicable specification.