AT-600A
Immersion-flow Sensor

INSTALLATION INSTRUCTIONS

The immersion sensor has been designed for use with the TraceTek and AquiTron™ leak detection systems.

Applications for the immersion sensor include: overflow pipes for boilers, heating systems, unvented hot water cylinders, blow down pipes, drainage, tank level control and applications using double containment pipe systems.

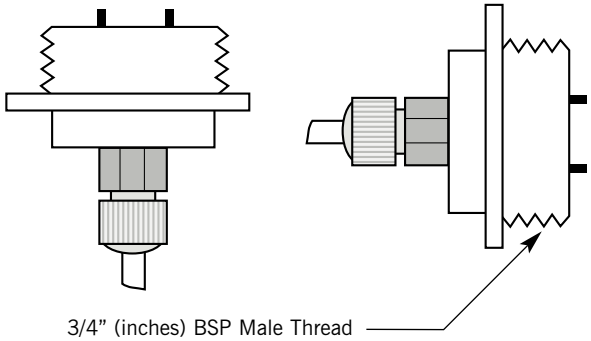

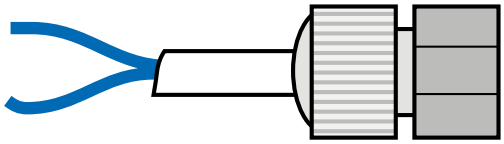

Note: The immersion sensor should be mounted in either the vertical or horizontal position as shown to suit the application

Wiring/connection

Connect the white and blue wires into the TraceTek and AquiTron™ control panel.
Blue to the yellow/black terminal
White to the red/green terminal

Technical Information

Type	AT-600A
Brass body	3/4" (inches) BSP Male Thread
Maximum operating temperature	100 deg C
Probe tips	Coated Stainless Steel
Mounting	Vertical and horizontal to suit application
Fly lead connection	2 metres
Fixing	Screw the brass body into a female 3/4" BSP fitting and seal with an 'O' ring or PTFE/sealing tape
Draining	Unscrew the brass body, dry and refit

Ordering Information

Catalogue number	2435 AT-600A Immersion-flow sensor

Optional

Alternative brass body threads i.e. metric available to order

Important: All information, including illustrations, is believed to be reliable. Users, however, should independently evaluate the suitability of each product for their application. Aquilar Limited makes no warranty as to the accuracy or completeness of the information, and disclaims any liability regarding its use. The only obligations of Aquilar Limited are those in the Aquilar Standard Terms and Conditions of Sale for this product, and in no case will Aquilar Limited be liable for any incidental, indirect, or consequential damages arising from the sale, resale, use or misuse of the product. Specifications are subject to change without notice. In addition, Aquilar Limited reserves the right to make changes - without notification to Buyer - to processing or materials that do not affect compliance with any applicable specification.

AquiTron is a trademark of AquiTron Limited
Aquilar is a trademark of Aquilar Limited
TraceTek is a trademark of Tyco Thermal Controls

Aquilar Limited
Dial Post Court, Horsham Road,
Rusper, West Sussex RH12 4QX. UK
Tel: + 44 (0) 1293 871874
Fax: +44 (0) 1293 871717

E-mail: info@aquilar.co.uk
www.aquilar.co.uk

Master TraceTek Distributor UK & Ireland for
Raychem® TraceTek®
Water, Fuel and Chemical Leak Detection

aquilar - leak detection systems

© 2003 AQUILAR LIMITED Printed in the UK. H9530 02/03