

## TT1000

### TraceTek Water-Sensing Cable

TraceTek TT1000 sensing cables detect the presence of water at any point along their length. Installed with a TraceTek alarm and locating module, the cable senses water intrusion, triggers an alarm, and pinpoints the location.

#### Distributed sensing

TT1000 sensing cables provide distributed leak detection and location over a wide range of areas. The cable is available in a variety of lengths to provide as much coverage as needed.

#### Design flexibility

TT1000 sensing cable is supplied with factory-installed plastic connectors that plug together.


The cable is designed for a range of applications, including data center sub-

floors, telecommunication rooms, HVAC equipment locations, pipes, electrical vaults, storage areas, tanks, and roofs. The cable is small, lightweight, and flexible, allowing easy installation. The smooth design allows for quick drying.

#### Advanced technology

Raychem's conductive polymer technology and fluoropolymer construction make TT1000 sensing cable mechanically strong and resistant to corrosion and abrasion. The cable is constructed of two sensing wires, an alarm signal wire, and a continuity wire embedded in a fluoropolymer carrier rod. The alarm module constantly monitors the sensing cable for continuity. The rugged cable construction exposes no metal, and enables it to be reusable even in corrosive environments.

### Ordering information

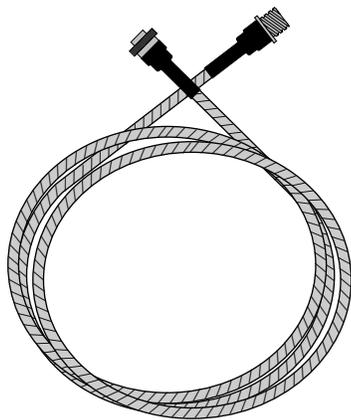

#### TT1000 modular sensing cable with factory-installed connectors

##### Catalog Number

TT1000-1M/3FT-PC  
TT1000-3M/10FT-PC  
TT1000-7M/25FT-PC  
TT1000-15M/50FT-PC




##### Description

3-ft (1 m) sensing cable  
10-ft (3 m) sensing cable  
25-ft (7 m) sensing cable  
50-ft (15 m) sensing cable

##### Notes:

- Refer to the System Selection Guide for other components of the TraceTek system.
- TT1000 sensing cables are compatible with existing TraceTek TT100 systems.

# TT1000 Water-Sensing Cable

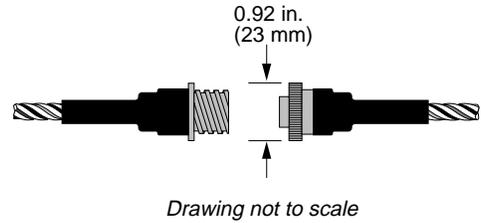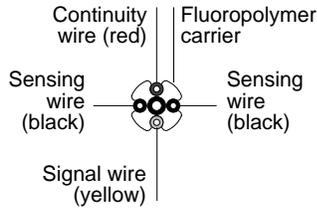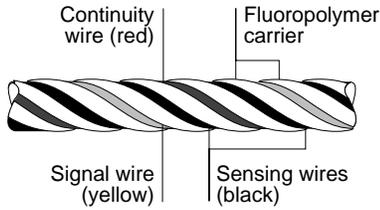

## Product characteristics

Cable diameter	0.24 in. (6.0 mm) nominal
Continuity and signal wires	2 x 26 AWG with insulation of fluoropolymer
Sensing wires	2 x 30 AWG with jacket of conductive fluoropolymer
Carrier	Fluoropolymer
Cable weight (50-ft length)	2.3 lb
Cable color	High-visibility yellow

## Technical Information

Breaking strength	Cable only: 160 lb Including connectors: 70 lb
Cut-through force	>50 lb with 0.005 in. blade Crosshead speed 0.2 inch/minute
Abrasion resistance	>65 cycles per UL 719
Maximum continuous operating temperature	174°F (75°C)
Fire resistance	Class 2 plenum cable per NEC 1996 725-71 (a) UL 910 Modified Steiner Tunnel Test

## Performance data

Leak size to alarm (tap water)	2 inches maximum at any point along sensing cable; up to 5000 feet maximum system length.
Drying time	Cable dries and resets within 15 seconds of removal from standing water.
Standard cleaning method	Wipe with clean damp cloth.

## Approvals



The TraceTek products group is a part of Raychem Chemelex Division. Chemelex Division is ISO 9001 certified.

## Raychem Corporation TraceTek Products Group

300 Constitution Drive  
Menlo Park, CA 94025  
Tel (800) 553-1737  
(415) 361-4900  
Fax (415) 361-3215

*All information, including illustrations, is believed to be reliable. Users, however, should independently evaluate the suitability of each product for their application. Raychem makes no warranties as to the accuracy or completeness of the information, and disclaims any liability regarding its use. Raychem's only obligations are those in the Raychem Standard Terms and Conditions of Sale for this product, and in no case will Raychem be liable for any incidental, indirect, or consequential damages arising from the sale, resale, use, or misuse of the product. Specifications are subject to change without notice. In addition, Raychem reserves the right to make changes—without notification to Buyer—to materials or processing that do not affect compliance with any applicable specification.*